



PORK SOLUTIONS // RNC

WORTH THE INVESTMENT

With the Frontmatec-AIRA neck clipper, improved yields is one of the advantages, as the clipping of necks is determined and performed with high precision.

The concept

With the Frontmatec-AIRA robots, continuous operation on the dressing line conveyor is maintained, as the robots are synchronized with the main line conveyor. While carcasses are pulled forward, the position, depth, and angle are determined by the detection unit (vision scanner), the process is performed in a downward movement.

The Frontmatec-AIRA concept is dynamic, as multiple robots can be fitted along the main conveyor of the slaughter line. The Frontmatec-AIRA robots are all “plug and play”, and can operate in any type of new or existing pig slaughter lines.


Hygiene

For eliminating and minimizing cross contamination, the tools are efficiently cleaned and sterilized after each operation. To ensure high hygiene levels, as well as easy and efficient cleaning, the robot is covered with a strong flexible protective cover with constant air flow inside and lightly over-pressure, keeping the vital part of the robot clean and safe in the harsh environment.



Value for you!

- High capacity: 750 carcasses/hour
- Fully automated cutting and precise clipping of necks
- Head remains attached, while bone has been completely severed
- Yield improvements
- Easy to service, minimal movable parts, quick and easy change of cutting tool

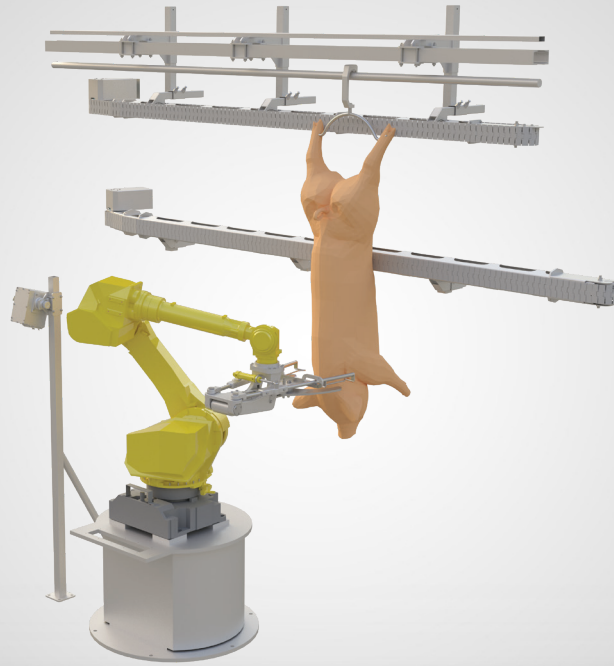

System consisting of:

- Robot with a hygienic protective cover
- Cutting tool attached to the robot
- Sterilization system
- Vision system which is installed along the slaughter line
- Control unit with transformer box
- Robot fence with secured entrance

Safety and legal requirements

The Frontmatec-AIRA aitch bone cutter is CE approved and designed to meet the strictest demand on health and safety.

Advantages with the Frontmatec-AIRA concept

- A concept founded on more than 20 years of experience in R&D and engineering of automated processing.
- Homogeneous processing and high quality cuts.
- High hygiene level with integrated sterilization of cutting tools, minimizing the risk of cross contamination.
- Reduction of labor cost with one robot.
- Human-machine interface for setting and adjusting the robot.
- Low maintenance.
- Easy and swift to clean and keep clean.
- Easy operation and troubleshooting with uniform user-friendly operator panels on the Frontmatec-AIRA robots.
- Software interfaces with monitoring systems.

Pre-conditions

Capacity	750 carcasses/hour
Live weight	60-140 kg/132-308 lbs
Process parameters	Individual cutting parameters for each carcass, customized settings possible
Vision scanner	3D vision system based on optical measuring device
Voltage	380-575V AC 50/60Hz 3 phase
Control voltage	24V DC

Requirements

Water	6 bar (min. 4 bar constantly)
Water consumption	Cold (<20°C) 1.2 liter/pig*
	Hot (>82°C) 0.5 liter/pig*
Compressed air	8 bar (min. 6 bar constantly)

**Dry air, free of oil and dust absorbed. Approved for use in the food industry ISO 8573-1:2010 Class 1.4.1*

**Values are based on experience in the field and cannot be guaranteed, as many factors can influence these numbers*

**Technical data may be subject to changes*

Frontmatec-AIRA_V1-0_2024_EN

CONTACT

Central/Eastern Europe
+49 252 185 070
service.de@frontmatec.com

Northern Europe, Kolding
+45 36 999 099
service.kol.dk@frontmatec.com

Northern Europe, Tandslet
+48 227 345 551
service.tan.dk@frontmatec.com

Southern Europe
+34 932 643 800
service.es@frontmatec.com

Western Europe
+31 886 294 000
service.nl@frontmatec.com